

# SUNNY TRIPOWER

## 15000TL / 20000TL / 25000TL



STP 15000TL-30 / STP 20000TL-30 / STP 25000TL-30



**Intelligent service with  
SMA Smart Connected**



**SMA ShadeFix**  
STRING LEVEL OPTIMIZATION

### Efficient

- Maximum efficiency of 98.4%
- Yield increase without installation effort due to integrated shade management SMA ShadeFix

### Safe

- DC surge arrester (SPD type II) can be integrated

### Flexible

- DC input voltage of up to 1000 V
- Multistring capability for optimum system design
- Optional display

### Innovative

- Cutting-edge grid management functions with Integrated Plant Control
- Reactive power available 24/7 (Q on Demand 24/7)


## SUNNY TRIPOWER 15000TL / 20000TL / 25000TL

The versatile specialist for large-scale commercial plants and solar power plants

The Sunny Tripower is the ideal inverter for large-scale commercial and industrial plants. Not only does it deliver extraordinary high yields with an efficiency of 98.4%, but it also offers enormous design flexibility and compatibility with many PV modules thanks to its multistring capabilities and wide input voltage range.

The future is now: the Sunny Tripower comes with cutting-edge grid management functions such as Integrated Plant Control, which allows the inverter to regulate reactive power at the point of common coupling. Separate controllers are no longer needed, lowering system costs. Another new feature—reactive power provision on demand (Q on Demand 24/7).

## Efficiency Curve

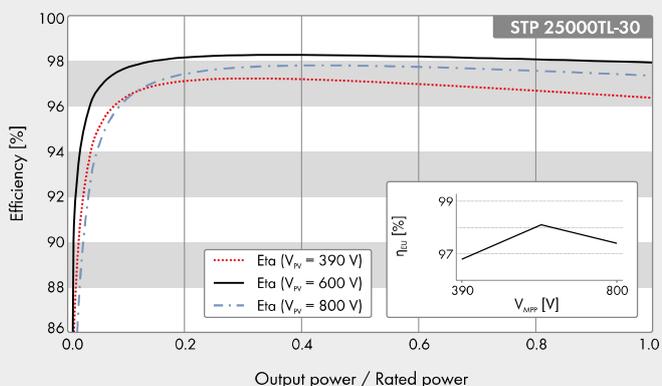

## Accessory



RS485 interface  
DM-485CB-10



Power Control Module  
PWCMOD-10



DC surge arrester Typ II,  
inputs A and B  
DCSPD KIT3-10



Multifunction relay  
MFR01-10

● Standard features ○ Optional features – Not available  
Data at nominal conditions  
Status: 03/2020

### Technical Data

#### Input (DC)

|  |
|--|
| Max. generator power                                     |
| DC rated power   |
| Max. input voltage                                       |
| MPP voltage range / rated input voltage                  |
| Min. input voltage / start input voltage                 |
| Max. input current input A / input B                     |
| Number of independent MPP inputs / strings per MPP input |

#### Output (AC)

|  |
|--|
| Rated power (at 230 V, 50 Hz)                                      |
| Max. AC apparent power   |
| AC nominal voltage   |
| AC voltage range   |
| AC grid frequency / range  |
| Rated power frequency / rated grid voltage                         |
| Max. output current / Rated output current                         |
| Power factor at rated power / Adjustable displacement power factor |
| THD  |
| Feed-in phases / connection phases                                 |

#### Efficiency

|                                       |
|---------------------------------------|
| Max. efficiency / European Efficiency |
|---------------------------------------|

#### Protective devices

|   |
|---|
| DC-side disconnection device  |
| Ground fault monitoring / grid monitoring   |
| DC surge arrester (Type II) can be integrated   |
| DC reverse polarity protection / AC short-circuit current capability / galvanically isolated  |
| All-pole sensitive residual-current monitoring unit   |
| Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1) |

#### General data

|  |
|--|
| Dimensions (W / H / D)   |
| Weight   |
| Operating temperature range                                      |
| Noise emission (typical)   |
| Self-consumption (at night)                                      |
| Topology / cooling concept                                       |
| Degree of protection (as per IEC 60529)                          |
| Climatic category (according to IEC 60721-3-4)                   |
| Maximum permissible value for relative humidity (non-condensing) |

#### Features / function / Accessories

|   |
|---|
| DC connection / AC connection   |
| Display   |
| Interface: RS485, Speedwire/Webconnect                                      |
| Data interface: SMA Modbus / SunSpec Modbus                                 |
| Multifunction relay / Power Control Module                                  |
| Shade management SMA ShadeFix / Integrated Plant Control / Q on Demand 24/7 |
| Off-Grid capable / SMA Fuel Save Controller compatible                      |
| Guarantee: 5 / 10 / 15 / 20 years   |
| Certificates and permits (more available on request)                        |

\* Does not apply to all national appendices of EN 50438

Type designation

| Sunny Tripower<br>15000TL | Sunny Tripower<br>20000TL | Sunny Tripower<br>25000TL |
|---------------------------|---------------------------|---------------------------|
|---------------------------|---------------------------|---------------------------|

|                        |                        |                        |
|------------------------|------------------------|------------------------|
| 27000 W <sub>p</sub>   | 36000 W <sub>p</sub>   | 45000 W <sub>p</sub>   |
| 15330 W                | 20440 W                | 25550 W                |
| 1000 V                 | 1000 V                 | 1000 V                 |
| 240 V to 800 V / 600 V | 320 V to 800 V / 600 V | 390 V to 800 V / 600 V |
| 150 V / 188 V          | 150 V / 188 V          | 150 V / 188 V          |
| 33 A / 33 A            | 33 A / 33 A            | 33 A / 33 A            |
| 2 / A:3; B:3           | 2 / A:3; B:3           | 2 / A:3; B:3           |

|          |          |          |
|----------|----------|----------|
| 15000 W  | 20000 W  | 25000 W  |
| 15000 VA | 20000 VA | 25000 VA |

|                           |
|---------------------------|
| 3 / N / PE; 220 V / 380 V |
| 3 / N / PE; 230 V / 400 V |
| 3 / N / PE; 240 V / 415 V |

|                        |
|------------------------|
| 180 V to 280 V         |
| 50 Hz / 44 Hz to 55 Hz |
| 60 Hz / 54 Hz to 65 Hz |

|               |
|---------------|
| 50 Hz / 230 V |
|---------------|

|               |             |                 |
|---------------|-------------|-----------------|
| 29 A / 21.7 A | 29 A / 29 A | 36.2 A / 36.2 A |
|---------------|-------------|-----------------|

|                                     |
|-------------------------------------|
| 1 / 0 overexcited to 0 underexcited |
|-------------------------------------|

|      |
|------|
| ≤ 3% |
|------|

|       |
|-------|
| 3 / 3 |
|-------|

|               |               |               |
|---------------|---------------|---------------|
| 98.4% / 98.0% | 98.4% / 98.0% | 98.3% / 98.1% |
|---------------|---------------|---------------|

|                     |
|---------------------|
| ●                   |
| ● / ●               |
| ○                   |
| ● / ● / -           |
| ●                   |
| 1 / AC: III; DC: II |

|  |
|--|
| 661 / 682 / 264 mm (26.0 / 26.9 / 10.4 inch) |
|--|

|                   |
|-------------------|
| 61 kg (134.48 lb) |
|-------------------|

|                                      |
|--------------------------------------|
| -25 °C to +60 °C (-13 °F to +140 °F) |
|--------------------------------------|

|          |
|----------|
| 51 dB(A) |
|----------|

|     |
|-----|
| 1 W |
|-----|

|                            |
|----------------------------|
| Transformerless / Opticool |
|----------------------------|

|      |
|------|
| IP65 |
|------|

|      |
|------|
| 4K4H |
|------|

|      |
|------|
| 100% |
|------|

|                                |
|--------------------------------|
| SUNCLIX / spring-cage terminal |
|--------------------------------|

|   |
|---|
| ○ |
|---|

|       |
|-------|
| ○ / ● |
|-------|

|       |
|-------|
| ● / ● |
|-------|

|       |
|-------|
| ○ / ○ |
|-------|

|           |
|-----------|
| ● / ● / ● |
|-----------|

|       |
|-------|
| ● / ● |
|-------|

|               |
|---------------|
| ● / ○ / ○ / ○ |
|---------------|

AS 4777, BDEW 2008, C10/11, CE, CEI 0-16, CEI 021, CNS 15382, CNS 15426, DEWA 2.0, DK1, DK2, EN 50549-1, EN 50549-2, G99/1, EN 50438:2013\*, IEC 60068-2-x, IEC 61727, IEC 62109-1/2, IEC 62116, IS 16221-1/2, IS 16169, MEA 2013, NBR 16149, NEN EN 50438, NRS 097-2-1, PEA 2013, NTS, PPC, RD 1699/413, RD 661/2007, Res. n°7:2013, RiG compliant, SI4777, TOR generator, UTE C15-712-1, VDE 0126-1-1, VDE-ARN 4105, VDE-ARN 4110, VFR 2014

|                |                |                |
|----------------|----------------|----------------|
| STP 15000TL-30 | STP 20000TL-30 | STP 25000TL-30 |
|----------------|----------------|----------------|

### Authorised Distributor

MonoSun Technology Co.,Ltd  
Tel: 076-263717  
Email: info@monosun.net  
Website: www.monosun.net  
12/493 ChaofaTawanTok Moo3 T.Wichit  
A.Muang Phuket 83000