

# JS 30 SERIES

## ELECTRICAL PERFORMANC

Electrical parameters at Standard Test Conditions (STC)

			JS 35	JS30
Module name			YL35P-17b 1/4	YL30P-17b 1/4
Module type			YL35P-17b 1/4	YL30P-17b 1/4
Power output	$P_{max}$	W	35	30
Power output tolerances	$\Delta P_{max}$	%	+/- 5	+/- 5
Module efficiency	$\eta_m$	%	12.80	11.00
Voltage at $P_{max}$	$V_{mpp}$	V	18.00	17.10
Current at $P_{max}$	$I_{mpp}$	A	1.94	1.75
Open-circuit voltage	$V_{oc}$	V	22.30	21.20
Short-circuit current	$I_{sc}$	A	2.08	1.87

STC: 1000W/m<sup>2</sup> irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.  
Average relative efficiency reduction of 5% at 200W/m<sup>2</sup> according to EN 60904-1.

## THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	46 +/- 2
Temperature coefficient of $P_{max}$	$\gamma$	%/°C	-0.45
Temperature coefficient of $V_{oc}$	$\beta_{Voc}$	%/°C	-0.37
Temperature coefficient of $I_{sc}$	$\alpha_{Isc}$	%/°C	0.06

## OPERATING CONDITIONS

Max. system voltage	50V <sub>DC</sub>
Max. series fuse rating	5A
Limiting reverse current	Don't apply external voltages larger than Voc of the module
Operating temperature range	-40 to 85°C
Max. static load, front (e.g., snow and wind)	2400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

## CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material / dimensions)	36 / multicrystalline silicon / 156mm x 39mm
Encapsulant (material)	ethylene vinyl acetate (EVA)
Frame (material / color / anodization color)	anodized aluminum alloy / silver / clear

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

Baoding Jiasheng Photovoltaic Technology Co., Ltd  
Add: No.333 North Lekai Avenue 071051, Baoding, China  
Email: jsgd@yinglisolar.com  
Web: www.gainsolar.cn  
Service hotline: +86 312 863 1510/892 2683  
Fax: +86 312 892 2202

**GAINSOLAR.CN**

© Baoding Jiasheng Photovoltaic Technology Co., Ltd | JS030P-17b\_14\_EU\_EN\_201403\_v02



## GENERAL CHARACTERISTICS

Dimensions (L / W / H)	535mm / 510mm / 25mm
Weight	3.27kg

## PACKAGING SPECIFICATIONS

Number of modules per box	6
Packaging box dimensions (L / W / H)	570mm / 540mm / 190mm

Unit: mm

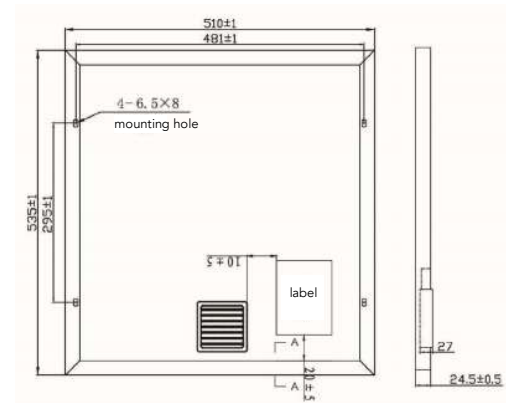

Warning: Read the Installation and User manual in its entirety before handling, installing, and operating Yingli Solar modules.

Our Partners:



**Authorised Distributor**

MonoSun Technology Co., Ltd

12/493 ChaofaTawanTok Rd., Moo 3 T. Wichit

A. Muang Phuket Thailand 83000

Office Tel: 076-263717 Service Tel: 083-5502272

Website: www.monosun.net Email: info@monosun.net



Power Your Life